


Miro 36 Pro

Shaker / Dryer

Extra-large curing system built for **high-volume and reliable output.**

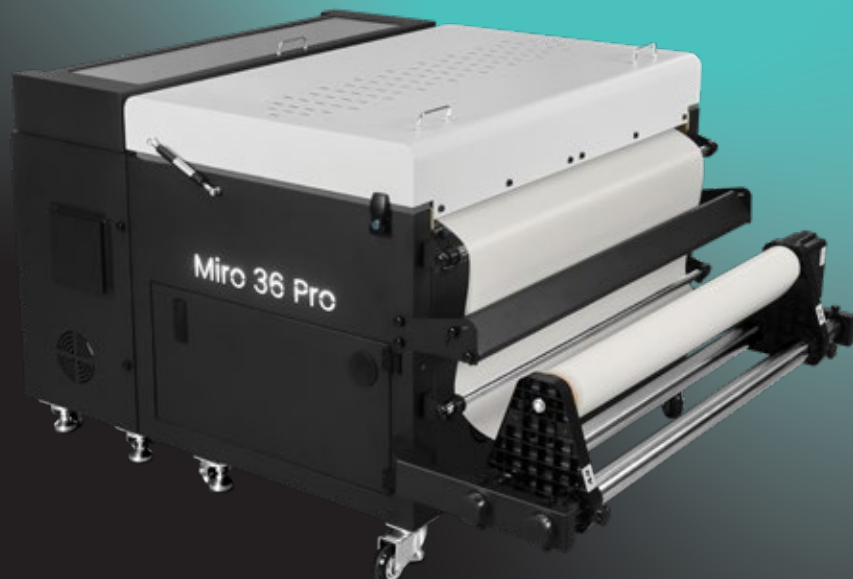

Scale Without Limits.



Supports printers up to 36" width

Rated for machines operating up to 237 sq. ft. per hour at full width.



Bottom, upper and curved heating platens

Even, consistently cured transfers across a 36" sheet.



Advanced safety sensors

Sensors protect both the workflow and the equipment on a machine this size.



Touchscreen control panel

Intuitive operation despite the scale of the machine.



Built-in filtration

Powder and fumes stay in the cabin, so the machine runs without ventilation ducting.

Works with

- Prestige X6
- Epson SureColor G6070
- Mimaki TxF300-75
- Mimaki TxF150-75
- Any other 36" DTF printer up to 237 sq. ft./h

See it run. Contact your DTF Station dealer or visit dtfstation.com.

Contact Us



sales@dtfstation.com



(562) 573-1117



dtfstation.com



@dtfstation

Dealer Locator



Thirty-Six Inches Of Curing.

Thirty-six inch curing.

The Miro 36 Pro is the most capable machine in the Miro line, rated for printers up to 36" running up to 237 sq. ft. per hour. It is a curing solution and high-speed production shaker for wide-format work.

Even results at scale.

Bottom, upper and curved heating platens keep a 36" sheet cured consistently edge to edge, which becomes harder the wider the media gets.

Safety built in.

Advanced safety sensors protect the operator and the equipment, and built-in filtration keeps powder and fumes contained on an open floor.



Support Every Step of the Way

Each machine comes with more than a warranty.



Full video library — install, troubleshooting, maintenance



Searchable knowledge base of written guides



Live ticketing support via Discord



AI-powered triage bot for instant first answers

Specifications

Max Film Width	36" (90 cm)	Heating Platen	Curved, smooth media flow
Rated For	Printers up to 237 sq. ft./h	Filtration	Built in + external connection
Powder Application	Automatic	User Interface	New touchscreen UI + PLC control
Curing	Bottom + upper platen heating	Safety Sensors	Auto safety stop

Install & Facility

Dimensions (W x D x H)	43.3" x 76.4" x 32.4"
Weight	500 lb (226.5 kg)
Power Supply	110 V / 220 V
Rated Current	28 A / 14 A
Power Consumption	3,100 W